
Wall - Masonry | (R-3.7, R-4.2, R-6.1)

InfraStop® Installation Instructions

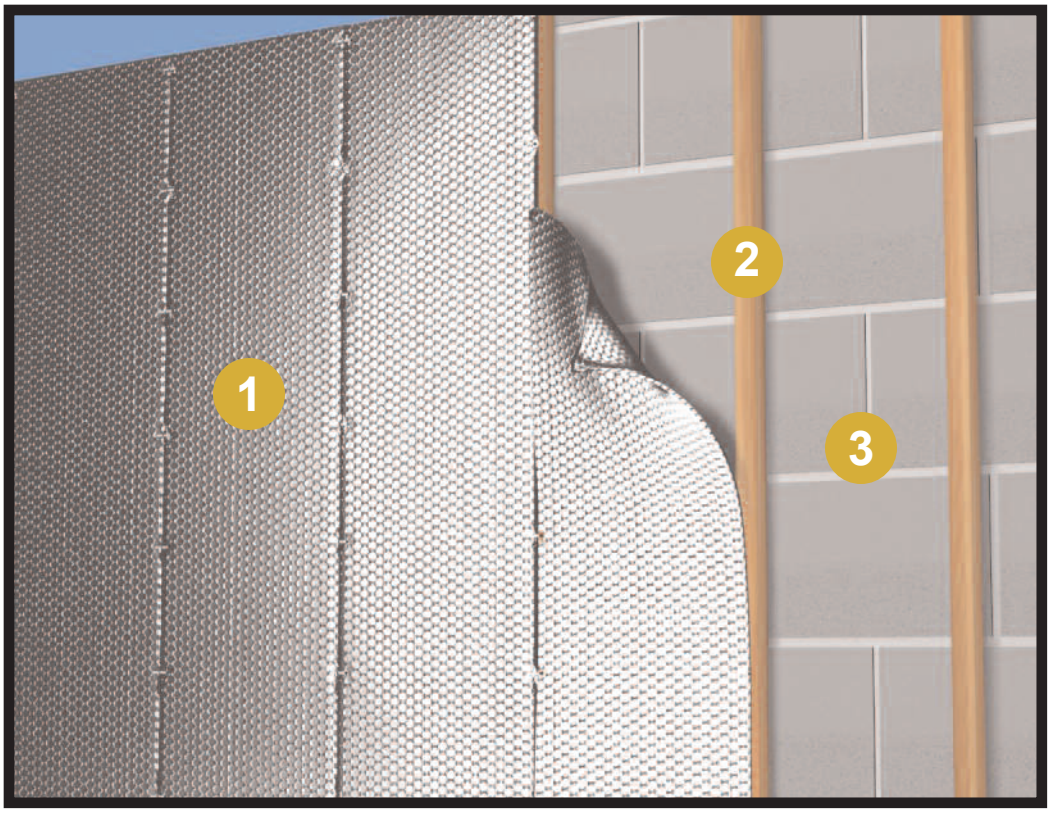

1. **InfraStop® Insulation**
2. **1”x 2” (nominal) Furring Strip**
3. **Concrete Block Wall**

Tools Required:

Safety Glasses
Staple Gun
Tape Measure
Utility Knife/Scissors

Note: Installation instructions and illustrated drawings are recommendations only, while proper local construction methods are the responsibility of the installer.

Recommended Products:

Staple Tab, Reflective/Bubble/Bubble/Reflective - Roll: ISSTFDF16050 (16”x 50’), ISSTFDF16100 (16”x 100’), ISSTFDF24050 (24”x 50’), ISSTFDF24100 (24”x 100’)

Installation Instructions: (There are 3 “levels of benefit” options)

1. R-3.7 (1”x 2” nominal furring)

- Attach 1”x 2” (nominal) furring strips vertically at an interval of 16” on center to the masonry wall (with an adhesive or fastener that is specified for this application).
- Cut the InfraStop® Reflective/Bubble/Bubble/Reflective, Staple Tab product (using scissors or a utility knife) into lengths equal to the height of the wall (floor to ceiling).
- Staple the product to the face of the furring strip - product seams should split on a furring strip.
- One air space is created between the InfraStop® and the masonry wall.
- Finish with interior panel (or sheetrock) of choice.

2. R-4.2 (2”x 2” nominal furring)

- Same as above except utilize 2”x 2” (nominal) furring.

3. R-6.1 (2”x 2” nominal furring)

- Same as above, except the product is not stapled to the face of the furring strip.
- Staple the product to the side of the furring strip at a depth of 3/4”. The goal is to split the cavity (in two) into approximately equal air spaces.
- The two air spaces created are: one between the InfraStop® and the masonry wall, and the other between the new interior panel and the InfraStop® .

Review These Important Safety Guidelines Prior to Installation:

- **ALWAYS** check local building codes before installing InfraStop®.
- **ALWAYS** check the area you are insulating and make any needed repairs. Any worn wiring should be replaced before you begin installing InfraStop®.
- **ALWAYS** make sure work areas are well ventilated and well lighted.
- **ALWAYS** use eye protection when operating a staple gun.
- **ALWAYS** use caution and common sense when using a staple gun. Be aware of where electrical wiring is located. Stapling into a wire can cause severe shock or death. **NEVER** staple into electrical wiring.
- **ALWAYS** be careful when working with large pieces of InfraStop® on windy days.
- When installing InfraStop® on bright sunny days, it is best to wear sun glasses.
- Do not work in areas such as attics when temperatures are too hot.
- Visit our website at **www.insulationstop.com** for additional product and installation information.

Please Note:

The intention of these Installation Instructions and 3-D renderings are for the sole purpose of illustrating the correct location and relative position of the InfraStop® products in specific building assemblies. The correct construction methods and techniques are the responsibility of the installer or contractor. The methods outlined are recommendations on location of the InfraStop® products as a guideline. There are no claims on the part of InfraStop® that these building assemblies are finite standards or meet building code requirements (as they can vary by region).

InfraStop®

www.insulationstop.com
Phone: 800-871-0410
Fax: 888-838-5376
Email: customer.support@insulationstop.com